
# **Spin-Blast HD**




- For pipes 18" to 48" ID
- Air motor control offers flexibility in cleaning rates for varying surface conditions
- Adjustable centering carriage for consistent blast pattern
- Use with standard blast machine

Pipe cleaning just got easier with the Spin-Blast HD from Clemco. The Spin-Blast HD is a rugged, portable, high-production tool for blast cleaning the internal surface of steel pipe. Its carriage adjusts for cleaning pipe from 18 inches to 48 inches inside diameter.

The Spin-Blast HD is a pneumatic tool that is used as an accessory to a standard blast machine. Compressed air powers an air motor for control of the blast head rotation speed allowing infinite flexibility for varying degrees of contamination of the steel surface. The tool can be used with nozzles from 3/8" ID to 1/2" ID and requires a minimum of 1-1/2" ID blast hose. [Larger nozzles can be used in special situations—consult distributor].

Authorized Distributor:

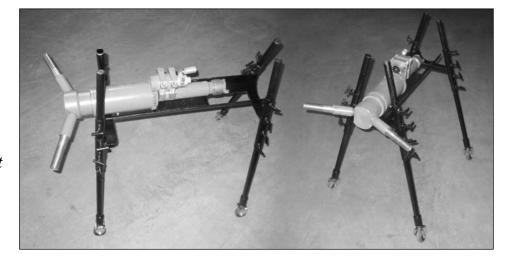

#### Advantages

- Sturdy, rugged tool that withstands the harsh blast environment
- Few moving parts to replace
- Independent air motor control of blast head suits varying surface conditions

### Air Consumption in cfm

Nozzle Orifice Size	3/8"	7/16"	1/2"
Air Motor	50	50	50
Nozzles (2)	392	508	676
Total cfm	442	558	726

## **Typical Applications**

- Prepare new pipe for coating
- Strip coatings from pipeline for inspection and repair
- Remove damaged coatings, rust, or corrosion

## **Ordering Information**

Spin-Blast HD tool (less nozzles) with carriage25070
Spin-Blast HD tool (less nozzles) without carriage25129
Nozzle TSP-6 long venturi, rubber jacketed, 3/8" orifice23516
Nozzle TSP-7 long venturi, rubber jacketed, 7/16" orifice23517
Nozzle TSP-8 long venturi, rubber jacketed, 1/2" orifice23518
Carriage Assembly25117

ISO 9001-2000 certified. Clemco is committed to continuous product improvement. Specifications are subject to change without notice.

© 2007 Clemco Industries Corp. One Cable Car Drive, Washington, MO 63090 Tel: (636) 239-4300 • Fax (800) 726-7559 Email: info@clemcoindustries.com www.clemcoindustries.com

Stock No. 24936 JF: 2322-0207 Rev. C 02/08

